


SL787EB LED



○ WH-RAL9016 / White RAL9016 / Textured

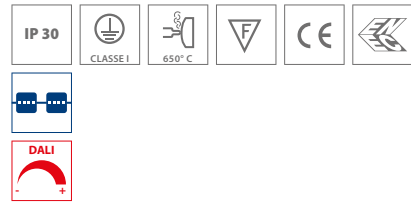

Optic



OPAL COVER



MICROPRISMATIC COVER

Recessed LED indoor luminaire, comprising:

- Extruded aluminium profile housing, die-cast aluminium end caps, painted
- The fitting is available with different light optics:
 - Microprismatic diffuser for efficient light diffusion, glare reduction and a high uniformity
 - Opal PMMA diffuser for optimal light diffusion and a high light uniformity
 - Colour rendering index Ra > 80
 - Colour tolerance according to MacAdam ≤ 3 SDCM
 - Also dimmable via TouchDIM®
 - Flexible choice of feed points
 - Includes recessed mounting kit
 - Special colour versions available upon request
 - Continuous mounted version at www.light-performer.com

