




# SL787PL LED

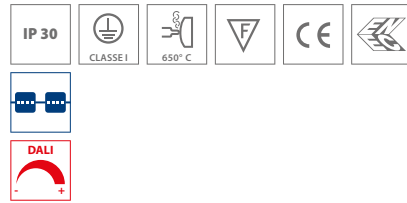

● GR-EV1 / Anodised grey / Matt



## Optic




OPAL COVER



MICROPRISMATIC COVER

- LED suspended luminaire for interior, comprising:
- Extruded aluminium housing, anodised (EV1), die-cast aluminium endcaps, powder painted
- The fitting is available with different light optics:
- Microprismatic diffuser for efficient light diffusion, glare reduction and a high uniformity
  - Opal PMMA diffuser for optimal light diffusion and a high light uniformity
  - Light distribution direct or direct/ indirect
  - Colour rendering index Ra > 80
  - Colour tolerance according to MacAdam  $\leq 3$  SDCM
  - Also dimmable via TouchDIM®
  - Complete with steel suspension cable (1.5 m), transparent power cord and ceiling rose
  - Special colour versions available upon request
  - Continuous mounted version at [www.light-performer.com](http://www.light-performer.com)

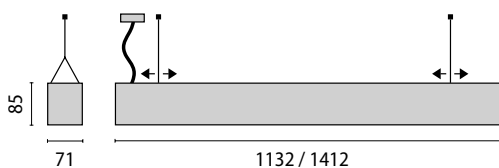

## SL787PL LED MICROPRISMATIC COVER D/I

IK07 2J xx5 - 650°

LAMPHOLDER	WATTAGE	CLASS	CRI	KELVIN	COS φ ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER	EURO
LED	51 W	I	•	80	3000	•	S/B	2 x 38°/44°	6810 lm	4940 lm	80	10	50000 h	● 8787461726370	
LED	51 W	I	•	80	4000	•	S/B	2 x 38°/44°	7020 lm	5100 lm	80	10	50000 h	● 8787461726470	
LED	60 W	I	•	80	3000	•	S/B	2 x 38°/44°	7940 lm	5740 lm	80	10	50000 h	● 8787461846370	
LED	60 W	I	•	80	4000	•	S/B	2 x 38°/44°	8190 lm	5920 lm	80	10	50000 h	● 8787461846470	

### Power LED - 220/240 V 50/60 Hz

LED	51 W	I	•	80	3000	•	S/B	2 x 38°/44°	6810 lm	4940 lm	80	10	50000 h	● 8787461723370	
LED	51 W	I	•	80	4000	•	S/B	2 x 38°/44°	7020 lm	5100 lm	80	10	50000 h	● 8787461723470	
LED	60 W	I	•	80	3000	•	S/B	2 x 38°/44°	7940 lm	5740 lm	80	10	50000 h	● 8787461843370	
LED	60 W	I	•	80	4000	•	S/B	2 x 38°/44°	8190 lm	5920 lm	80	10	50000 h	● 8787461843470	



## SL787PL LED MICROPRISMATIC COVER

IK07 2J xx5 - 650°

LAMPHOLDER	WATTAGE	CLASS	CRI	KELVIN	COS φ ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER	EURO
LED	34 W	I	•	80	3000	•	S/A	2 x 38°/44°	4540 lm	3180 lm	80	10	50000 h	● 8787261486370	
LED	34 W	I	•	80	4000	•	S/A	2 x 38°/44°	4680 lm	3280 lm	80	10	50000 h	● 8787261486470	
LED	43 W	I	•	80	3000	•	S/A	2 x 38°/44°	5680 lm	3980 lm	80	10	50000 h	● 8787261606370	
LED	43 W	I	•	80	4000	•	S/A	2 x 38°/44°	5850 lm	4100 lm	80	10	50000 h	● 8787261606470	

### Power LED - 220/240 V 50/60 Hz

LED	34 W	I	•	80	3000	•	S/A	2 x 38°/44°	4540 lm	3180 lm	80	10	50000 h	● 8787261483370	
LED	34 W	I	•	80	4000	•	S/A	2 x 38°/44°	4680 lm	3280 lm	80	10	50000 h	● 8787261483470	
LED	43 W	I	•	80	3000	•	S/A	2 x 38°/44°	5680 lm	3980 lm	80	10	50000 h	● 8787261603370	
LED	43 W	I	•	80	4000	•	S/A	2 x 38°/44°	5850 lm	4100 lm	80	10	50000 h	● 8787261603470	



## SL787PL LED OPAL COVER D/I

IK07 2J xx5 - 650°

LAMPHOLDER	WATTAGE	CLASS	CRI	KELVIN	COS φ ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER	EURO
LED	51 W	I	•	80	3000	•	S/C	2 x 53°/54°	6810 lm	4760 lm	80	10	50000 h	● 8787491726370	
LED	51 W	I	•	80	4000	•	S/B	2 x 53°/54°	7020 lm	4900 lm	80	10	50000 h	● 8787491726470	
LED	60 W	I	•	80	3000	•	S/C	2 x 53°/54°	7940 lm	5500 lm	80	10	50000 h	● 8787491846370	
LED	60 W	I	•	80	4000	•	S/C	2 x 53°/54°	8190 lm	5670 lm	80	10	50000 h	● 8787491846470	

### Power LED - 220/240 V 50/60 Hz

LED	51 W	I	•	80	3000	•	S/B	2 x 53°/54°	6810 lm	4760 lm	80	10	50000 h	● 8787491723370	
LED	51 W	I	•	80	4000	•	S/B	2 x 53°/54°	7020 lm	4900 lm	80	10	50000 h	● 8787491723470	
LED	60 W	I	•	80	3000	•	S/C	2 x 53°/54°	7940 lm	5500 lm	80	10	50000 h	● 8787491843370	
LED	60 W	I	•	80	4000	•	S/C	2 x 53°/54°	8190 lm	5670 lm	80	10	50000 h	● 8787491843470	



## SL787PL LED OPAL COVER

IK07 2J xx5 - 650°

LAMPHOLDER	WATTAGE	CLASS	CRI	KELVIN	COS φ ≥ 0,9	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER	EURO
LED	34 W	I	•	80	3000	•	S/A	2 x 53°/54°	4540 lm	2990 lm	80	10	50000 h	● 8787291486370	
LED	34 W	I	•	80	4000	•	S/A	2 x 53°/54°	4680 lm	3090 lm	80	10	50000 h	● 8787291486470	
LED	43 W	I	•	80	3000	•	S/A	2 x 53°/54°	5680 lm	3740 lm	80	10	50000 h	● 8787291606370	
LED	43 W	I	•	80	4000	•	S/A	2 x 53°/54°	5850 lm	3860 lm	80	10	50000 h	● 8787291606470	

### Power LED - 220/240 V 50/60 Hz

LED	34 W	I	•	80	3000	•	S/A	2 x 53°/54°	4540 lm	2990 lm	80	10	50000 h	● 8787291483370	
LED	34 W	I	•	80	4000	•	S/A	2 x 53°/54°	4680 lm	3090 lm	80	10	50000 h	● 8787291483470	
LED	43 W	I	•	80	3000	•	S/A	2 x 53°/54°	5680 lm	3740 lm	80	10	50000 h	● 8787291603370	
LED	43 W	I	•	80	4000	•	S/A	2 x 53°/54°	5850 lm	3860 lm	80	10	50000 h	● 8787291603470	

